

When used in combination with a Salcom Paging Message Transmitter, the 12-36 provides a telephone controlled, voice prompted paging interface. All paging functions available when using a paging message transmitter are also available via the office PABX system from any telephone, by using the telephone keypad. Users who are unfamiliar with the system are guided through the process by electronically recorded voice prompts.



## 12-36 Paging Telephone Voice Interface

Experienced operators can short cut the process by entering the appropriate key sequence without waiting for the prompts.

The voice prompted telephone access system comprising a Paging Message Transmitter, and the 12-36 Telephone Voice Interface is called "FONEpage".

As when using a paging transmitter, there are several types of paging calls which can be made from telephone extensions:

**Normal pager call;**

**Predefined message:**

Predefined messages (sometimes called "canned messages") can be programmed into the paging transmitter using configuration software. Pager codes and predefined messages cannot be changed via the telephone.

**Message confirmation:**

FONEpage confirms that the call has been sent once a call is placed into the transmission queue with the prompt "*Page Sent*" or "*Message Sent*" depending on the type of call made.

**Sending another message:**


Once the "*Message Sent*" or "*Page Sent*" prompt has been issued, it is possible to immediately enter another pager code and message, or wait 5 seconds for the prompt to be guided through the process again.

The 12-36 configuration tool allows configuration of:

- Language.
- Delay before 12-36 answers call.
- Custom wave files. New wave files can be uploaded to allow the 12-36 to use a custom message.



To use the USB port to communicate with the 12-36, a Virtual Com Port driver must be installed on the PC.

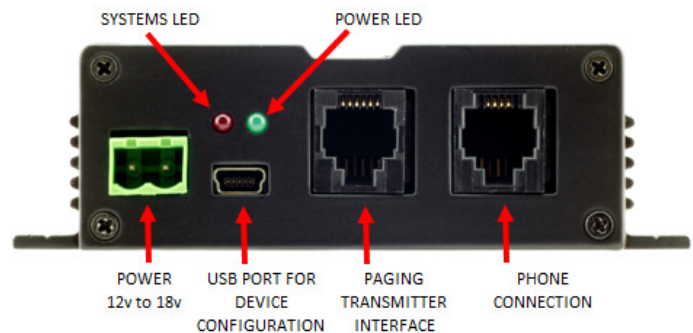

**Language:** Language to use. The 12-36 is pre-programmed with English (default), Spanish and French voice files. Using the configuration software the user may select a custom voice file option and upload their own wave files.

**Answer Delay:** How long the 12-36 will wait before answering the call. (In seconds 0-25). By using a long ring delay the 12-36 may share a common phone line if required.

**File Upload:** Allows message replacement when "custom" language has been selected.

Designed in New Zealand

A  designed system  
www.salcom.com

Sea, Air & Land Communications Ltd (Salcom)  
10 Vanadium Place, Addington, Christchurch 8024  
Tel: +64 (0)3 379 2298 E: sales@salcom.com

<b>Technical Specification</b>	
<b>12-36-0000 - Paging Telephone Voice Interface</b>	
Power Supply	+13.8V typical (11 to 15 VDC range)
Power Consumption	Normal Operation: 45mA
Configuration Application	12-36 PSD
Serial Port	9600 , N, 8, 1; USB
Other I/O	Telephone Interface: 2-Wire, 600Ω dc blocked transformer with electronic loop and optically isolated ring detector
Languages Supported	English, French and Spanish. User may support any other language by uploading their own Wav files
Connectors	Paging transmitter interface (RS232) = RJ12 (6P6C) Phone connection = RJ11 (6P4C)
Power Connector	2-way plug & socket, screw connections (supplied)
Environmental Protection	Not suitable for outdoor use and should be protected from adverse environmental conditions
Operating Temperature	-10°C to +50°C (+14°F to +122°F)
Indicators	Power LED (Green) - Slow Flashing = Normal Operation Status LED (Red) - On = Processing Call - Flashing = Error Condition
Weight	302g
Enclosure Dimensions	100mm x 130mm x 30mm (WxDxH)
Enclosure Material	Extruded aluminium
Colour	Matt black
Type Approvals	AS/NZS CISPR 22:2009 (EMC) EN 55022:2006+A1:2007 (EMC)



Configuration tool available for free download at: [www.salcom.com/products/page/12-36-0000](http://www.salcom.com/products/page/12-36-0000)

Support: Tel: +64 (0)3 379 2298 / E: [support@salcom.com](mailto:support@salcom.com)

Email: [sales@salcom.com](mailto:sales@salcom.com)